

# Impact Foam cover guard




Impact Foam cover guard is an extruded microcellular construction manufactured from a blend of low-density polyethylene flame retardant foam. The product has the ability to cushion and absorb shock, offering total protection against maximum impact, indentation, marking, paint over-spray and most chemicals.

**Part Number: CG0515FM**

## General Applications

Temporary, flame retardant protection for all types of horizontal and vertical finishes both indoor and outdoor including walls, doors, bulkheads, pillars, furniture, electrical equipment and corners. Also useful for wrapping and packaging.

Material		Flame retardant polyethylene foam
Colour		cover guard Ocean Blue
Thickness	mm	5
	inches	0.196
Roll Width	m	1.5
	inches	59
Roll Length	m	75
Roll Area	m <sup>2</sup>	113
Roll Weight	kilos	16
	lbs	35.2
Roll Diameter	mm	600
	inches	23.6

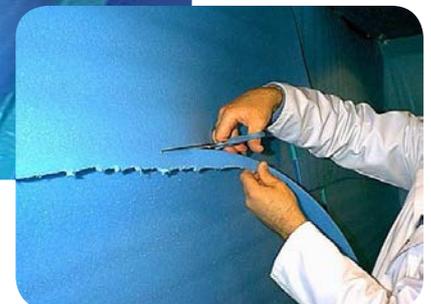

## Approvals & Testing

Selected samples from the cover guard range have been subjected to a series of tests utilising the test methodology contained in LPS 1207 Issue 2:2003 by BRE. The test report does not imply approval or certification and the test results only relate to the items tested and not necessarily to the product brought to market.

Satisfies: Small flame test to BS 476 Part 12 1991  
Large flame test to BS 5852, crib no.7  
Smoke emission EN 2825  
Toxic gas emission EN2826  
Oxygen index BS2782 (Part 1 method 141 1986)  
(ISO 4589-1984)

Warrington Fire Research  
IMO Resolution A.471(XII) as amended by resolution A652 (14)

FAR Part 25: Appendix F, Part 4 "Vertical Test"

BRE Report No.  
218077 Rev1  
28/07/04

WARRES No.  
302365  
05/07/01

WARRES No.  
302414  
21/07/01

Recommended by:  
Ministry of Defence DNES

Recognised by:  
Marine Safety Agency (DTI)

General Approvals:  
Lloyds Register of Shipping

Full test report available  
upon request.