




Solacryl

marine cover fabric by
Bainbridge

Solacryl - Uncoated

Solacryl - PU Coated

White



F83500100
F84500100

Captain Navy Blue



F83500206
F84500206

Marine Blue



F83500207
F84500207

Atlantic Blue




F83500208
F84500208

Navy Blue



F83500210
F84500210

Royal Blue



F83500220
F84500220

Mid Blue



F83500230
F84500230

Silver




F83500300
F84500300

Grey



F83500400

Cadet Grey



F83500401
F84500401

Charcoal Grey



F83500402
F84500402

Dark Grey



F83500404
F84500404

Carbon Silver



F84500420

Charcoal Tweed



F83500770
F84500770

Black



F83500450
F84500450

Stone



F83500500
F84500500

Moonrock



F83500520
F84500520

Beige



F83500600
F84500600

Linen Tweed



F83500775
F84500775

Dark Green



F83500700
F84500700

Red



F83500800
F84500800

Mid Red



F83500182
F84500182

Burgundy



F83500910
F84500910

Uncoated

PU Coated

Solacryl Uncoated Acrylic Canvas

- ◆ Dodgers, stack packs, sail covers, awnings and upholstery
- ◆ Infinity Process gives a softer fabric allowing for complex curves and shapes
- ◆ Weather resistant - rain or shine
- ◆ Easy clean
- ◆ Colour fastness 7-8 rating

UNCOATED

| | |
|-------------------|---|
| Width: | 152 cm |
| Finish: | Fluorocarbon Finishing |
| Water Column: | ≥300 mm |
| Weight: | 300 g/m ² |
| Tensile Strength: | Warp - 135 daN/5 cm Weft - 80 daN/5 cm |
| Water Repellence: | ≥5 |
| Oil Repellence: | ≥5 |

Solacryl PU Coated Acrylic Canvas


- ◆ Biminis, tonneaus, spray hoods, flybridge and mooring covers
- ◆ Superior waterproofing - giving a water column in excess of 1000mm
- ◆ Coated on one side with hi tech resin impregnation and **Infinity Process**
- ◆ Antimicrobial treatment prevents micro-organisms adhering to fabric
- ◆ Acrylic yarns give excellent UV protection

PU COATED

| | |
|-------------------|--|
| Width: | 152 cm |
| Finish: | Acrylic resin coating on one side. Special finish "Infinity" anti-stain, rot proof and water resistant |
| Water Column: | ≥1000 mm |
| Weight: | 325 g/m ² |
| Tensile Strength: | Warp - 155 daN/5 cm Weft - 90 daN/5 cm |
| Water Repellence: | ≥4 |
| Oil Repellence: | ≥4 |

Solacryl Benefits

- ◆ High quality appearance of a traditional cover
- ◆ Acrylic yarns give excellent UV stability
- ◆ 100% solution dyed for consistent, rich, non-fade colours
- ◆ Anti fungal coatings
- ◆ Rot proof, oil and grease resistant

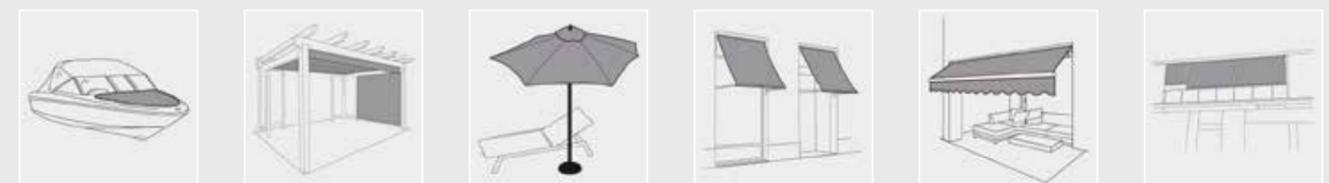

INFINITY PROCESS

Solacryl Acrylic Canvas is treated with a special technological **Infinity Process** to ensure the lasting quality of the fabric. In this process, nanoparticles completely cover the surface of the fibres in the fabric, forming a permanent coat. After treatment, both the surface and the inside of the fabric are permanently protected against dirt build-up, and adverse effects of a wide variety of atmospheric agents. The low reactivity and high stability of the treatment endows long-term protection to the awning, especially against mildew and provides excellent water and oil repellence whilst allowing for superior cover shapes.



Care cards and seam labels available on request

CARE & CLEANING

Proper care and cleaning should be taken to ensure the life of Solacryl Acrylic Canvas.

For regular care and maintenance, the excess dirt should be brushed from the fabric using a soft brush; the fabric should then be sprayed with warm water (not exceeding 40°C) and air-dried.

Periodically, the fabric should undergo a more thorough cleaning. Again, brush fabric with a soft bristled brush, spray with warm water, then apply a gentle soap. Let stand for 10 to 20 minutes taking care not to let it dry, then rinse thoroughly and air-dry. Do not use detergents and/or solvents.

WARRANTY

Solacryl Acrylic Canvas is manufactured with only the highest quality raw materials and the most rigorous quality-assurance procedures, we offer a **5-year warranty** on our 100% solution dyed acrylic products.

The warranty protects against the loss of characteristics, rot and discolouration typical in normal atmospheric conditions. This warranty does not apply against deterioration of any kind due to abusive use, accidental burns, negligence, vandalism, perforations, natural disasters or acts of nature. Normal wear, weather soiling or stains from environmental pollution or other sources are not covered.

The product must be properly installed and maintained. The warranty, if applicable, does not cover labour, frames, systems and installation supplied by the dealer.



Bainbridge International Ltd

8 Flanders Park, Southampton, Hampshire SO30 2FZ UK

T: +44 (0) 1489 776010

E: info@bainbridgeint.co.uk

W: bainbridgeint.com